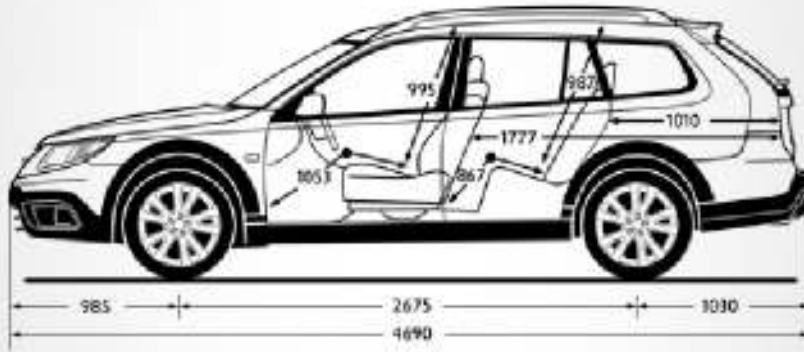


Sixty years
of innovative
thinking.
Specified.


[Change View](#)
[Equipment Levels](#)
[Standard and Options](#)
[Technical data](#)
[Accessories](#)


Engine specifications

[> View engine curve](#)
[> View engine curve](#)
[> View engine curve](#)

Engine fuel type	Diesel	Diesel	Petrol/Ethanol
Cylinders	4	4	4
Drive train	Front wheel drive	Front wheel drive	XWD (cross wheel drive)
Transmission	Automatic 6-speed	Manual 6-speed	Manual 6-speed
Displacement (dm ³)	1910	1910	1998
Bore/Stroke (mm)	90.4 / 82	90.4 / 82	86 / 86
Compression ratio	16.5:1	16.5:1	9.5:1
Max boost pressure (bar)	1.1	1.1	1.2
Max. Power (kW at r/min)	132 @ 4000	132 @ 4000	147 @ 5500
Max. Power (hp at r/min)	180 @ 4000	180 @ 4000	200 @ 5500
Max. Torque (Nm at r/min)	370 @ 1750 - 3250	400 @ 1850 - 2750	300 @ 2500 - 3500
Recommended fuel (octane)	Diesel	Diesel	95 or E85
Minimum fuel (octane)	Diesel	Diesel	91 or E85
Top speed (km/h)	215	220	230
0-100 km/h (sec)	9.2	8.7	8.5
80-120 km/h fifth gear (sec)	N/A	9.5	12.7
Fuel consumption (l/100 km)*	9.0 / 5.2 / 6.6	7.0 / 4.6 / 5.5	11.4 / 6.2 / 8.1
CO ₂ emissions (g/km)*	237 / 137 / 173	184 / 121 / 144	271 / 150 / 194
Engine description	Aluminium cylinder head, cast iron block. DOHC 16v. Common rail, direct and multiple injection. Two-stage turbo, VNT, intercooled. Dual-mass flywheel. Maintenance-free particulate filter. Euro 4 Emissions (Jan 06) compliant. Bosch. *City/highway/Combined driving cycle, according to the 1999/100 EC directive.	Aluminium cylinder head, cast iron block. DOHC 16v. Common rail, direct and multiple injection. Two-stage turbo, VNT, intercooled. Dual-mass flywheel. Maintenance-free particulate filter. Euro 4 Emissions (Jan 06) compliant. Bosch. *City/highway/Combined driving cycle, according to the 1999/100 EC directive.	Aluminium cylinder head and block. Turbocharger, intercooled. DOHC, 16-valve. Balancer shafts. Saab Trionic 8. *City/highway/Combined driving cycle, according to the 1999/100 EC directive. There are as yet no agreed EC directives governing the measurement of fuel consumption and CO ₂ emissions when driving on E85 bioethanol fuel, therefore figures shown refer to driving on petrol.

Measurements

Luggage compartment	477 dm ³ (VDA) with seats up. 1331 dm ³ (VDA) with seats down. Rear seats fold down completely or 60/40 %
Fuel tank capacity	61 liters; exception for diesel 58 liters.

Max trailer load	1600 kg (braked), 750 kg (unbraked)
Payload	Max 450 kg
Max roof load	100 kg
Kerb weight	1580 1761 kg (EU).
Distribution	XWD: 57/43%; FWD: 60/40% (front/rear)
Max total weight	2120-2200 kg depending on specification
Seating capacity	5
Drive train	All engines front, transversely-mounted, Hydraulically-damped. Front wheel drive or All wheel drive (Saab XWD).
Manual transmissions	6 speed manual transmissions.
Automatic transmissions	6-speed automatic transmissions available with Saab Sentronic manual selection, steering wheel buttons optional
Brakes	Hydraulic, dual circuit, vacuum booster. ABS, TCS, MBA, EBD, CBC.
Steering	Rack and pinion, hydraulic power assistance. Electro-hydraulic for diesel variants. Turning circle wall to wall: XWD 12,2 m; FWD 11,9 m. Turning circle curb to curb: XWD 11,7 m; FWD 11,4 m.
Suspension	Front: MacPehrson struts and gas shock absorbers. Anti-roll bar. Hydroformed sub-frame. Rear: Indep, fourlink, incl. toe-link, Coil springs. Gas shock absorbers. Anti-roll bar. Sub-frame.